


a Die + a DieHandle:

Practicing dispatch more

S.Ducasse, L. Fabresse, G. Polito, and P. Tesone



<http://www.pharo.org>

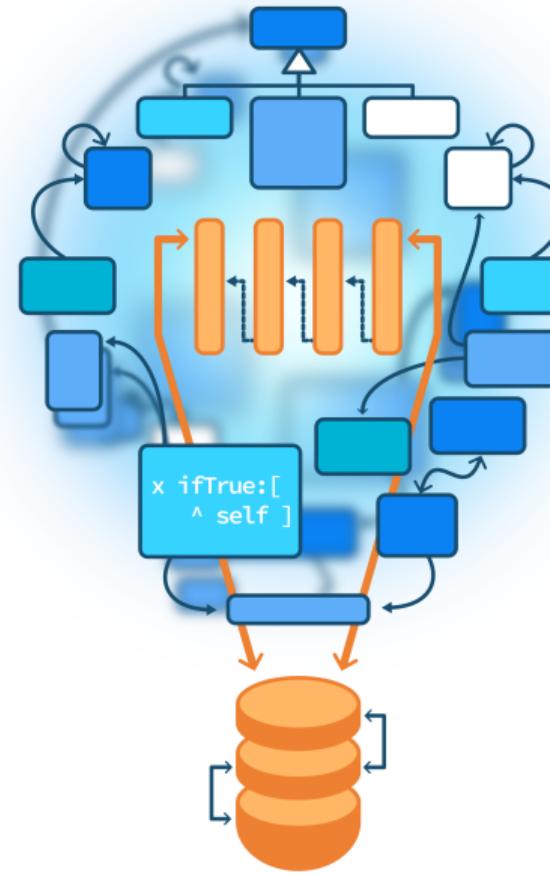

Goals

- See how conditionals can be turned into extensible design using messages
- Set the basis for more complex situation such as the Visitor Design Pattern



Remember Die and DieHandle

We create a die handle, add some die to it, and roll it.

```
| handle |
handle := DieHandle new
    addDie: (Die withFaces: 6);
    addDie: (Die withFaces: 10);
    yourself.
handle roll
```



Remember summing DieHandles

We add dieHandles together as in role playing games

```
DieHandleTest >> testSumming
| handle |
handle := 2 D20 + 3 D10.
self assert: handle diceNumber equals: 5
```



New requirement: N. 1

We want to add two dices together and get a DieHandle

(Die withFaces: 6) + (Die withFaces: 6)



NewRequirement1 asTest

```
DieTest >> testAddTwoDice
```

```
| hd |
```

```
hd := (Die withFaces: 6) + (Die withFaces: 6).
```

```
self assert: hd dice size equals: 2.
```



New requirement: N. 2

We want to be able to add a dice to a dice handle and the inverse

(Die withFaces: 6) + 2 D20

2 D20 + (Die withFaces: 6)



NewRequirement2 asTest

```
DieTest >> testAddingADieAndHandle
| hd |
hd := (Die withFaces: 6)
+
(DieHandle new
    addDie: (Die withFaces: 6);
    yourself).
self assert: hd dice size equals: 2
```



Possible solution with conditions

```
Die >> + aDieOrADieHandle  
| selfAsDieHandle |  
selfAsDieHandle := DieHandle new addDie: self.  
^ selfAsDieHandle + aDieOrADieHandle
```

We are on class Die so we

- systematically create a dieHandle with the receiver and
- sum it with the argument



Possible solution with conditions

```
DieHandle >> + aDieOrADieHandle
```

```
^ (aDieOrADieHandle class = DieHandle)
ifTrue: [ | handle |
    handle := self class new.
    self dice do: [ :each | handle addDie: each ].
    aDieOrADieHandle dice do: [ :each | handle addDie: each ].
    handle ]
ifFalse: [ | handle |
    handle := self class new.
    self dice do: [ :each | handle addDie: each ].
    handle addDie: aDieOrADieHandle.
    handle ]
```



Limits of this approach

- Works for two cases but does not really scale!
- Each time you have a new case you have to change this method
- If we have different objects that should interact with different operations e.g.,
 - different kinds of text objects: list, figures, paragraph, section, title, text, reference...
 - different operations: rendering text, HTML, LaTeX



Hints

- Sending a message is making a choice
 - the system **selects the correct** method for a given receiver and executes it
- To select a method based on the receiver AND the argument, we have to send a message to the argument



Sketch of the solution

- When we add two elements (die or dieHandle) together,
- We tell **the argument** to add itself to the receiver

We are explicit about the receiver since we know it:

- When the receiver is a die, we tell the argument to add itself **to a die**
- When the receiver is a die handle, we tell the argument add itself **to a die handle**

Let us do it now!



First adding two dice

A first try

```
Die >> + aDie
```

```
^ DieHandle new  
    addDie: self;  
    addDie: aDie;  
    yourself
```



Limits

```
Die >> + aDie
^ DieHandle new
    addDie: self;
    addDie: aDie;
    yourself
```

But aDie can be:

- A dice
- A die handle

For example as in

```
(Die withFaces: 6) + 2 D20
```



Introducing sumWithDie:

Adding two dice is useful, let us keep it and rename it:

```
Die >> sumWithDie: aDie
```


```
  ^ DieHandle new  
  addDie: self;  
  addDie: aDie; yourself
```

Now we just say to the argument that we want to add a die

```
Die >> + aDicable  
  ^ aDicable sumWithDie: self
```



Adding Two Dice and Ready for More

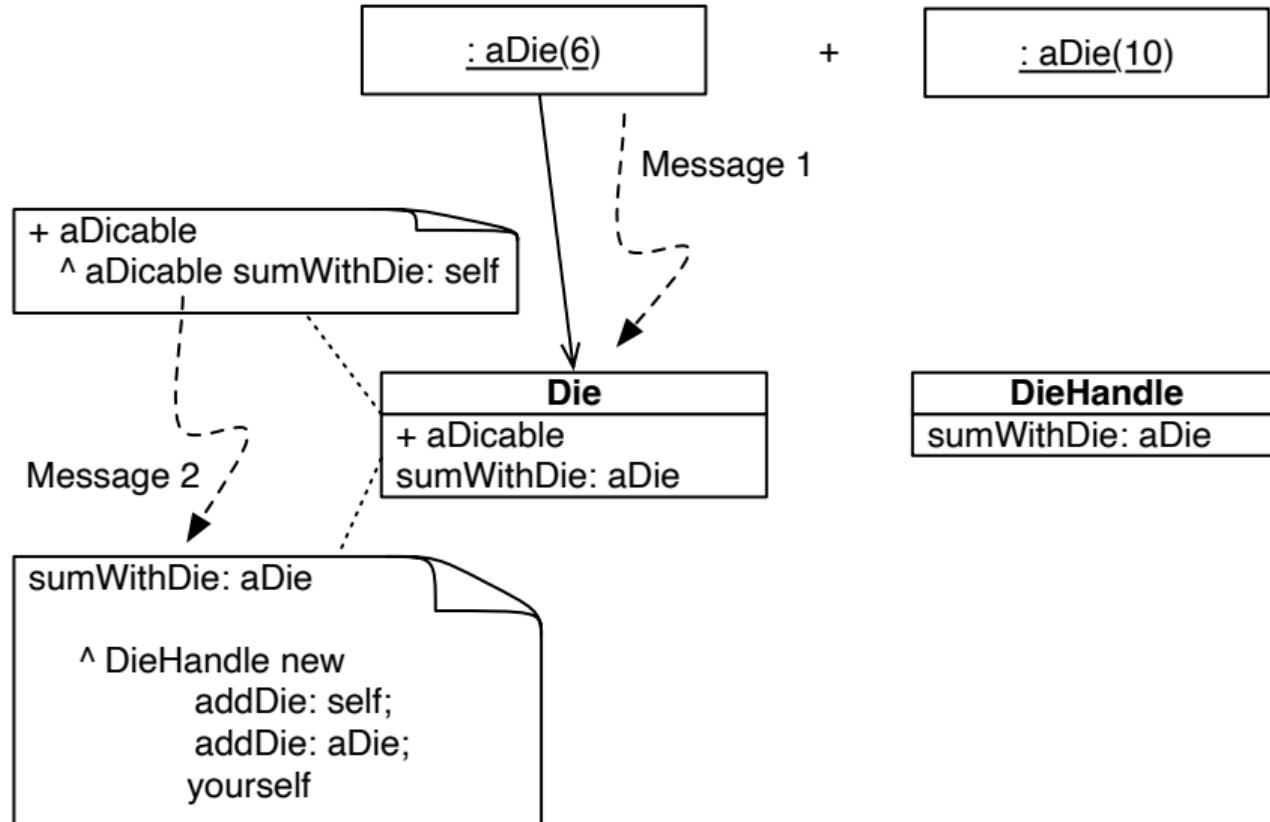

Handling DieHandle as Argument

For example:


```
(Die withFaces: 6) + 2 D20
```

We just have to define a different sumWithDie: method on DieHandle


```
DieHandle >> sumWithDie: aDie
| handle |
handle := self class new.
self dice do: [ :each | handle addDie: each ].
handle addDie: aDie.
^ handle
```



Handling DieHandle as Argument

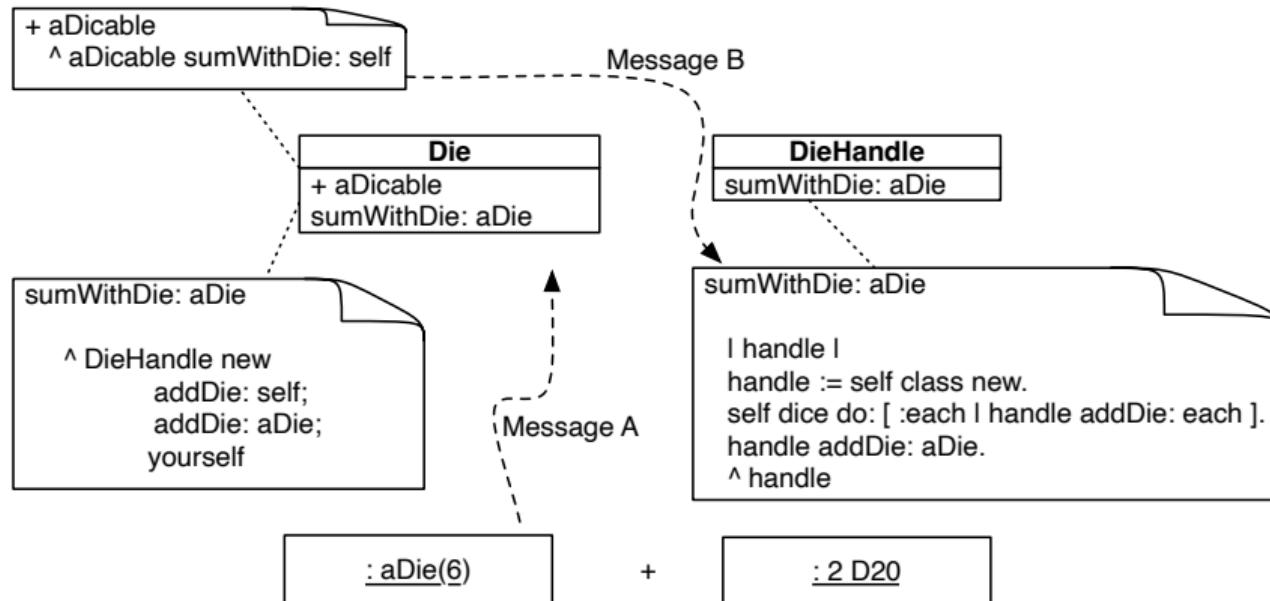

Sending a Message is Making a Choice

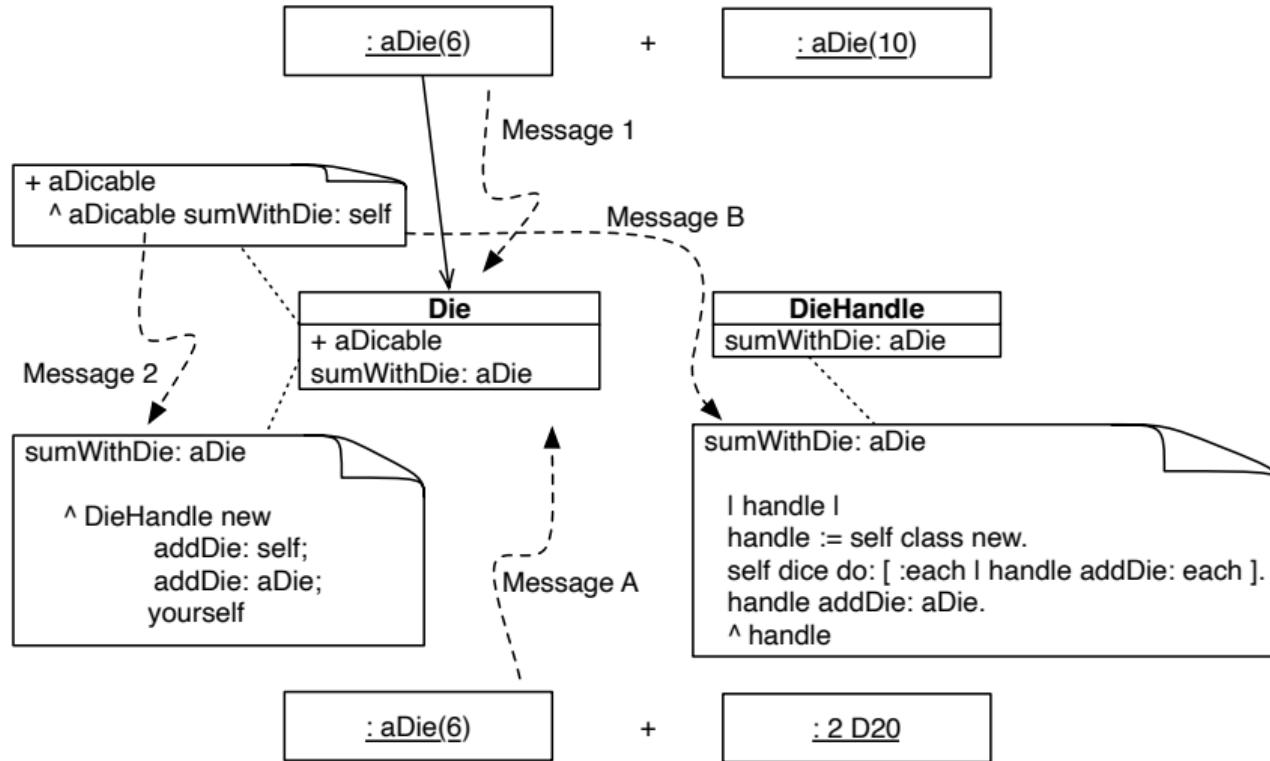

Sending a Message is Making a Choice

We get two messages/choices:

- One message for +
- One message for sumWithDie:



DieHandle as a receiver

Our solution should support:

2 D20 + (Die withFaces: 6)

2 D20 + 2D3



DieHandle as a receiver

We apply the same principle: We send a message to the argument telling to add itself with an handle

```
DieHandle >> + aDicable  
^ aDicable sumWithHandle: self
```

Then we have to support:

- Summing two die handles
- Summing one die handle and a die



Summing an handle with another one

```
DieHandle >> sumWithHandle: aDieHandle
| handle |
handle := self class new.
self dice do: [ :each | handle addDie: each ].
aDieHandle dice do: [ :each | handle addDie: each ].
^ handle
```




Now the argument can be a die

Since the argument can be a die, we define sumWithHandle: also on Die

```
Die >> sumWithHandle: aDieHandle
| handle |
handle := DieHandle new.
aDieHandle dice do: [ :each | handle addDie: each ].  
handle addDie: self
^ handle
```



Double Dispatch between Die and DieHandle

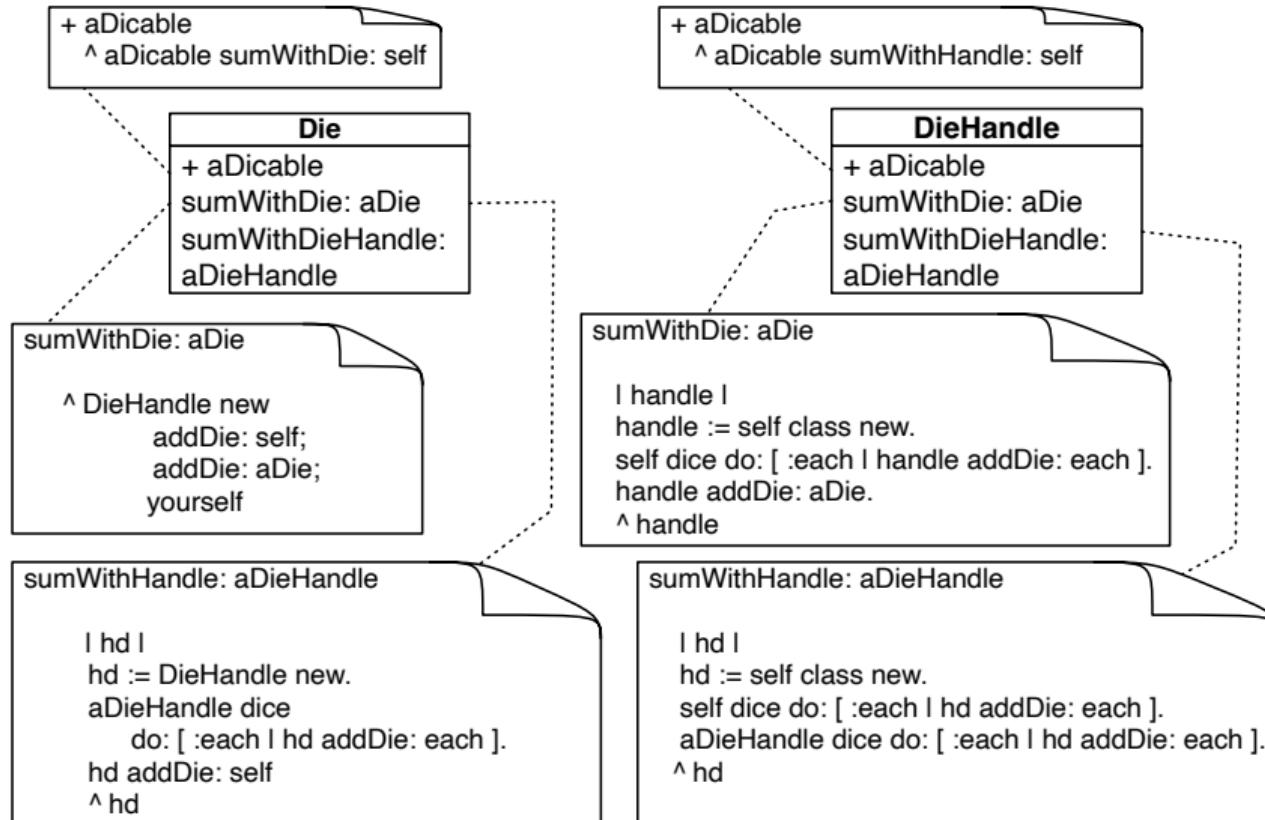

Stepping back

- We applied two times a simple principle
 - Sending a message is making a choice/selecting the right method
- So sending a message to the argument is a way to select again between a couple of methods.



Conclusion

- Powerful
- Modular (compiler with 70 nodes scales without problems)
- Just sending an extra message to an argument and using late binding once again
- Basis for advanced design such as the Visitor Design Pattern



Produced as part of the course on <http://www.fun-mooc.fr>

Advanced Object-Oriented Design and Development with Pharo

A course by
S.Ducasse, L. Fabresse, G. Polito, and P. Tesone



Except where otherwise noted, this work is licensed under CC BY-NC-ND 3.0 France
<https://creativecommons.org/licenses/by-nc-nd/3.0/fr/>